

FAO-200

FAO-200 Flavor Applicator


FAO-200 Flavor Applicator applies flavor to snack bodies continuously and uniformly. It consists of Product In-Feed Conveyor, Oil Spraying System, Powder Flavor Feeding System and Coating Tumbler.

After spraying oil to the snack body, metered amount of flavor is fed to the coating tumbler where the product is evenly coated with flavor by mean of specially designed spiral structure. Tumbler speed is controlled by inverter-operated speed controller to meet to optimum tumbling speed.

Component

Product Hopper, Infeed Conveyor, Oil Spraying System, Tumbler, Flavor Hopper, Flavor Agitator, Blower.

Electricity : 0.2 kw x 3, 0.4 kw x 1, 3.0kw x 1, 0.1 kw x 1.
Machine size : 5,520 mm (L) x 1,250 mm (W) x 1,750 mm (H)
Weight : Approx. 510 kgs
Capacity : Approx. 150-250kg of Roasted Products

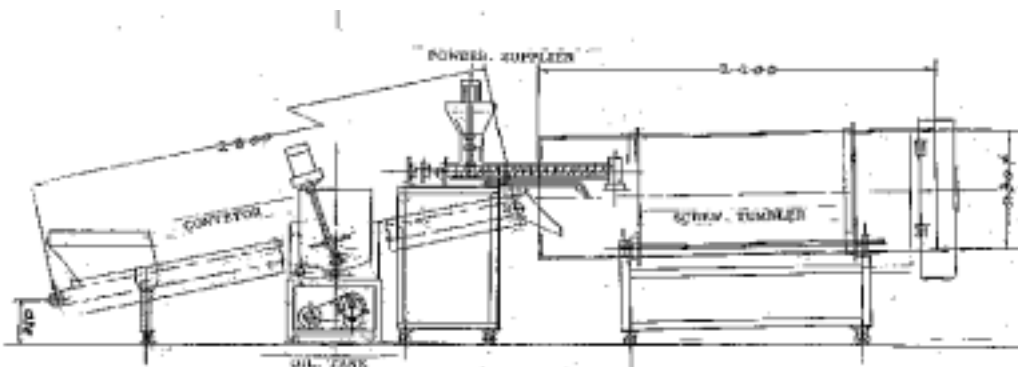

NP & Company Inc

3/F., Hodaka Bldg., No.8-21, 1-, Chome Fuminosato, Abeno-Ku, Osaka Japan
Tel:+81-6-627-3188 Fax:+81-6-627-0301, E-mail : nposk@nposk.com